

Catalog # Type Project Date Comments

DH4RT-ATO

4" Line Voltage Remodel Non-IC Airtight Housing



PRODUCT SPECIFICATION DATA

DESCRIPTION

4" Line voltage 120V Remodel Non-IC Airtight Small Aperture Housing. Insulation must be kept 3" away from the housing. Ideal for general, accent and task lighting.

FEATURES

- UL / cUL listed for damp location, feed-through wiring
- Thermally protected against misuse of insulation materials and improper lamping
- Sealed housing to prevent airflow from air conditioned or heated areas into ceiling
- Housing adjusts to accomodate various ceiling thickness
- Adjustable socket mounting plate for proper positioning of different lamp types
- Can be dimmed using standard incandescent dimmer

HOUSING

White painted steel housing is vertically adjustable (up to 1"), which allows housing to be flush with ceiling.

CI IDC

Four remodel tension clips secure the housing to the ceiling.

JUNCTION BOX

Pre-wired junction box with 7 1/2" knockouts with pryout slots and (4) romex knockouts with built-in strain relief to hold wire in place without any connectors. Junction box is equipped with grounding wire. Listed for through branch circuit.

LAMP & SOCKET

Medium base porcelain with nickel plated copper screw shell socket. Maximum of 50W R20/PAR20/PAR16; 40W A19.


INSTALLATION


- 5 1/2" height allows the fixture to be installed where 2x6 joist exists
- Housing can be installed from below the ceiling
- Four remodeling tension clips can accommodate 3/8" to 5/8" thick ceilings
- Comes with quick connectors which makes wiring connection easy. No wire nuts necessary.

LISTINGS


 $\ensuremath{\mathsf{UL/cUL}}$ Listed for feed through and damp location.



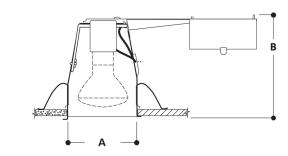

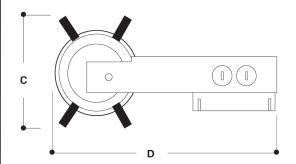

DIMENSIONS CEILING CUT-OUT 4 3/6" A: 4 1/8 " (106mm) C: 4 3/4 " (121mm) B: 5 1/2 " (140mm) D: 11 3/4 " (298mm)

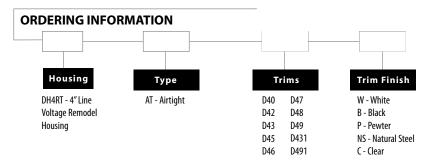



 Design : Quality
 1118 E 223rd St., Carson CA 90745
 DESIGNED & ASSEMBLED IN USA

 Specifications subject to change without notice
 Toll Free
 1.800.441.4422
 Tel
 1.323.934.7779
 Fax
 1.323.934.9886
 www.dmflighting.com
 Issued 091109