



Catalog #		Type
Project		Date
Comments		

PRODUCT SPECIFICATION DATA

DESCRIPTION

6" Sloped Line voltage 120V Remodel IC Airtight Housing. Can be in direct contact with insulation. Ideal for general, accent and task lighting.

FEATURES

- Adjustable socket allows lamp to be aimed straight down adjusted for pitch range 2/12 to 6/12.
- UL / cUL listed for damp location, feed-through wiring, and direct contact with insulation
- Thermally protected against misuse of insulation materials and improper lamping
- Sealed housing to prevent airflow from air conditioned or heated areas into ceiling
- Housing adjusts to accommodate various ceiling thickness
- Can be dimmed using standard incandescent dimmer

HOUSING

Aluminum steel housing is vertically adjustable (up to 1"), which allows housing to be flush with ceiling.

CLIPS

Four remodel tension clips secure the housing to the ceiling.

JUNCTION BOX

Pre-wired junction box with 7 1/2" knockouts with pryout slots and (4) romex knockouts with built-in strain relief to hold wire in place without any connectors. Junction box is equipped with grounding wire. Listed for through branch circuit.

LAMP & SOCKET



Medium base porcelain with nickel plated copper screw shell socket. Maximum of 75W.

INSTALLATION

- 7 7/8" height allows the fixture to be installed where 2x10 joist exists
- Housing can be installed from below the ceiling
- Four remodeling tension clips can accommodate 3/8" to 5/8" thick ceiling
- Comes with quick connectors which makes wiring connection easy. No wire nuts necessary.

LISTINGS

UL/cUL Listed for feed through and damp location.

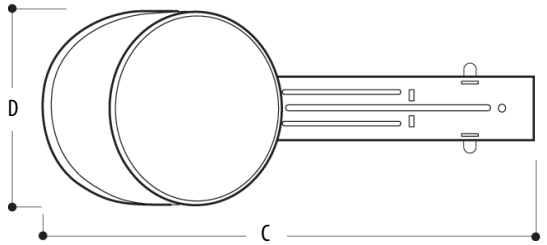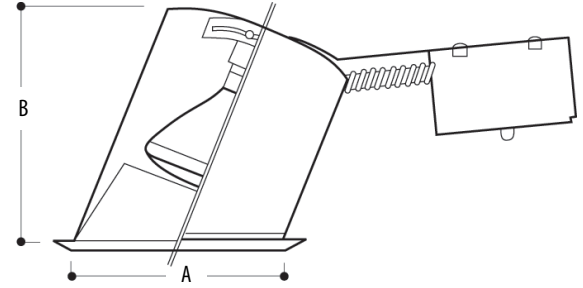

DIMENSIONS

CEILING CUT-OUT 6 5/8" x 7 1/8"

A:	6 1/2" x 6 3/4" (159x171mm)	C:	15 3/8" (391mm)
B:	7 1/2" (191mm)	D:	7 1/8" x 7 3/8" (181x187mm)

EXAMPLE:

Housing	Type	Trims	Trim Finish
DH900R	ICAT	D930	W

ORDERING INFORMATION

Housing	Type	Trims	Trim Finish
DH900 - 6" Sloped Remodel Housing	ICAT - IC Airtight	D930 D960	C - Clear W - White B - Black

