

**PRODUCT SPECIFICATION DATA**

**DESCRIPTION:**

Unique, new design combines an energy-efficient LED exit sign with an LED emergency light into one low-profile unit.

**ELECTRICAL/ILLUMINATION:**

- 3.8W power consumption
- 280 lumens from Light Pipe, 4.5W (36 LEDs x 0.125 watts)
- Energy-efficient, LED technology
- Dual 120V/277V voltage
- Adjustable light pipe allows for optimal use of light output
- High-performance smooth thermoplastic reflector and polycarbonate "light pipe" lens provides optimal light distribution and resistance to discoloration
- LVD (low voltage disconnect) prevents battery from deep discharge
- 4.8V, long-life, maintenance-free, rechargeable NiCd battery
- Internal solid-state transfer switch automatically connects the internal battery to LED board/light pipe for minimum 90-minute emergency illumination
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing


**HOUSING**

- Injection-molded, V-0 flame retardant, high-impact, thermoplastic in white finish
- Choice of red or green LED exit sign
- EZ snap-out chevron directional indicators - Universal mounting

**LISTINGS**

- UL Listed for damp locations - Meets UL924
- NFPA101 Life Safety Code
- NEC
- OSHA
- Meets all local and state codes

Type:
Catalog #:
Project:
Date:

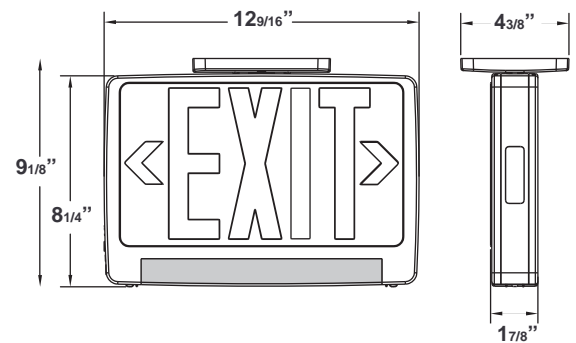

**5-YEAR WARRANTY**

**ORDERING INFORMATION** (Example: DLB440-G-2RC)

