



Catalog #		Type
Project		Date
Comments		

PRODUCT SPECIFICATION DATA

DLED510 series is ideal for all commercial and institutional facilities where energy saving operation and long service life is required. Intended for use with applications that require general purpose die cast aluminum exit signs with excellent illumination and low energy consumption.

FEATURES

- Universal mounting
- Available for single or double face
- 120V/277V AC, 60Hz dual voltage input
- Easy installation
- Solid die-cast aluminum compact housing in brushed aluminum.
- 6" Red or Green Letters
- One Year full warranty

LAMPS


LED lamps (Green or Red) mounted on circuit boards with expectancy life of over 10 years. Operates in both AC and DC input modes. LED board performs both on single and double face. Energy consumption of 3.2 watts for Red letters and 3.8 watts for Green letters.

LISTINGS

- ETL approved for damp location
- UL/cUL Listed

OPERATION

- **2C:** The exit sign is continuously illuminated by normal AC power. Whenever normal AC power fails, the building generator supplies power to the second circuit of the exit sign until normal AC power is restored. Two transformers with independent circuits connected to each transformer. Only one source of power is live.

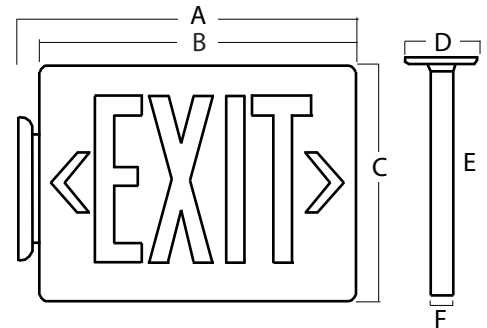

DIMENSIONS

A:	12 1/2" (317 1/2 mm)	B:	11 3/4" (298 1/2 mm)
C:	7 3/4" (197 mm)	D:	4 7/8" (124 mm)
E:	8 1/2" (216 mm)	F:	2 1/2" (63 1/2 mm)

EXAMPLE: DLED510 R BA Blank Blank

ORDERING INFORMATION

Product Code	Letters	Housing	Face	Circuit
DLED510	R: Red G: Green	BA: Brushed Aluminum	Blank: Single	Blank: Single 2C: 2-circuit

