

DRD3 LED

Circular rotation allows for precise light aim even after trim installation



Low profile design for seamless recessed look while tilting up to 40°



Adjustable Recessed LED Downlight


With an adjustable tilt up to 40° and rotatable light source, the DRD3 LED module is perfect for specialized lighting designs, including sloped ceilings and wall wash applications. The DRD3 is the evolution of DMF's popular DRD2 series and is compatible with most DRD2 frame-in kits and trims. Outputs of 750 or 1000 lumens and spot or flood light options make the adjustable downlight well suited for general or accent lighting.

Learn more at dmflighting.com/drd3

Product Specs

Application	4", 5", 6" New Construction, Remodel, Retrofit
Adjustment	360° directional aim, 40° tilt
Module Finish	White, Black, Custom
Lumen Output (Power)	750 lm (12.0W), 1000 lm (14.7W)
Color Quality	90+ CRI, 2-step SDCM
CCT Options	2700K, 3000K, 3500K, 4000K
Optics	Spot, Flood
Lifetime (L70)	50,000 hrs
Input Voltage	120/277V
Dimming	TRIAC/ELV dimming down to less than 5% standard for 120V only, optional 0-10V and Lutron dimming available for 120/277V
Emergency Lighting	Optional Emergency Battery Backup Units for emergency lighting up to 120 minutes
Trim Shape	Round
Trim Style	Smooth, Baffle
Trim Finish	White, Black, Silver Reflector w/ White Flange, Custom
Listings	cULus Listed, ENERGY STAR qualified, Title 24 compliant, CEC listed, IC rated, ASTM E283 certified Air Tight, UL Listed for Damp Location
Warranty	5 years

DRD3M
Adjustable LED Module

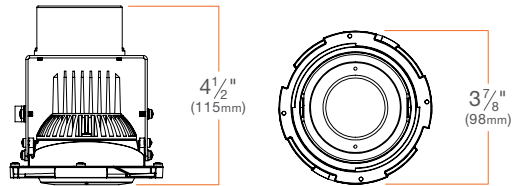

Product Selection Guide¹

LIGHT ENGINE

PRODUCT CODE	LUMENS (WATTS)	CRI	CCT	OPTIC	FINISH
DRD3M Module	07 750 lm (12.0W)	9 90+ CRI	27 2700K	SP Spot	WH White
	10 1000 lm (14.7W)		35 3500K		
			30 3000K	FL Flood	BK Black
			40 4000K		CC Custom

¹ For complete ordering information, including frame-in kit and trim, see spec sheet



MDRD3SSPROD V-02.15.16

