


# DRD1 LED

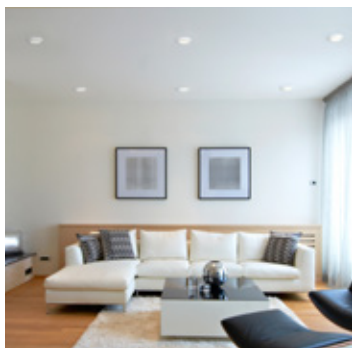









## Surface Mount or Recessed LED Downlight

The DRD1, with its all-in-one LED design, provides the most affordable path to LED downlighting. With quality construction and delivering up to 750 lumens of pleasing light, DRD1 is both economical and solid performing. This versatile lighting package is compatible with new construction, remodel or retrofit applications and installs in most 4", 5" or 6" recessed housings as well as most square or octagonal junction boxes.

Learn more at [dmflighting.com/drd1](http://dmflighting.com/drd1)

# Product Specs

|                      |  |
|----------------------|--|
| Profile              | 4" Surface Mount, 6" Surface Mount, 4" Recessed, 6" Recessed   |
| Application          | New Construction, Remodel, Retrofit  |
| Frame-in Kit         | 4", 5", 6", Octagonal Junction Box, Square Junction Box  |
| Lumen Output (Power) | Surface Mount: 750 lm (13.0W), Recessed: 700 lm (13.0W)  |
| Color Quality        | 90+ CRI, 3-step SDCM   |
| CCT Options          | 2700K, 3000K, 4000K  |
| Lifetime (L70)       | 50,000 hrs   |
| Input Voltage        | 120V   |
| Dimming              | TRIAC/ELV dimming down to 10% standard   |
| Listings             | cULus Listed, ENERGY STAR qualified, Title 24 compliant, CEC listed, IC rated, ASTM E283 certified Air Tight, UL Listed for Wet Location |
| Warranty             | 5 years  |

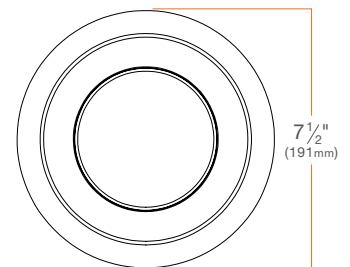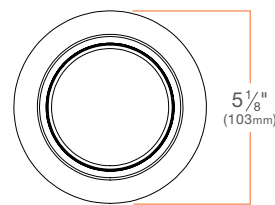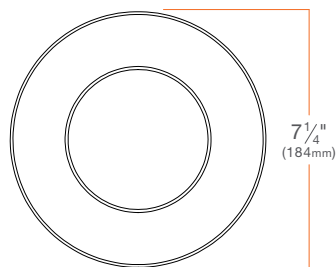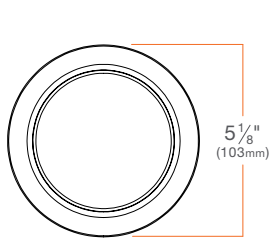

## Product Selection Guide<sup>1</sup>

### LUMINAIRE

| PRODUCT CODE | PROFILE        | CCT      |
|--------------|----------------|----------|
| DRD1 Module  | S4 4" Surface  | 27 2700K |
|              | S6 6" Surface  | 40 4000K |
|              | R4 4" Recessed | 30 3000K |
|              | R6 6" Recessed |          |

<sup>1</sup> For complete ordering information, including frame-in kit, see spec sheet



MDRD1SSPROD V-02.29.16

