

**PRODUCT SPECIFICATION DATA**

**DESCRIPTION:**

Ultra-compact, low-profile energy-efficient exit sign.

**ELECTRICAL/ILLUMINATION**

- Energy efficient, LED technology - 3.2W (Red), 3.8W (Green)
- Dual 120V/277V voltage
- LVD (low voltage disconnect) prevents battery from deep discharge
- Long-life, maintenance-free, rechargeable NiCd battery
- Internal solid-state transfer switch automatically connects the internal battery to LED Board for minimum 90-minute emergency illumination
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing


**HOUSING**

- Injection-molded, V-0 flame retardant, high-impact, thermoplastic housing
- Choice of red or green LED exit sign
- White or Black housing option
- Curved face, rounded corner design
- EZ snap-out chevron directional indicators
- Universal surface mount, wall or ceiling, with EZ-snap thermoplastic mounting canopy, which snaps into place making installation quick & easy
- Five year warranty on all electronics and housing. Batteries are pro-rated for 5 years

**LISTINGS**

- UL Listed for damp locations
- Meets UL924 standards
- NFPA101 Life Safety Code
- NEC
- OSHA
- Meets all local and state codes

Type:
Catalog #:
Project:
Date:

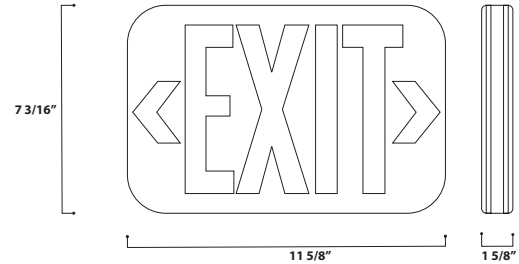

**ORDERING INFORMATION** (Example: DLED50-G-W)

