

Project:	Type:
Product Code:	Date:

V112125



3" Pendant Mount Cylinder

- Versatile, small diameter pendant mount cylinder
- Field cuttable cord and stem options
- Robust machined aluminum construction
- IP65/Wet Location standard across most configurations

CYLINDER

Mount

Cord, Stem

Size

Diameter: 3.5"
Height: 6.5", 9"

Suspension Length

Standard: 24" or 48"
Custom: Up to 156" (Cord) or 96" (Stem)

Canopy

Standard

Trims

Standard, Snoot, Wall Wash, Decorative

Finish

Standard: White, Black, Bronze
Premium: Brushed Aluminum, Custom

MAINTENANCE

Driver and LED chip are embedded within the cylinder module featuring touch-safe connections and replacement following trim removal.

LIGHT OUTPUT & DISTRIBUTION

Lumens (Power)

Downlight: 750 lm (9.5W), 1000 lm (12.5W), 1250 lm (14.3W), 1500 lm (14.3W)
Adjustable: 750 lm (9.5W), 1000 lm (12.5W)

Color Quality

93 CRI, 2-step SDCM

Color Temperature

- 2400K 2700K 3000K
- 3500K 4000K
- Warm Dim (3000K–1800K)
- Tunable White (4000K–1800K)
- Tunable White (6500K–2700K)

Beam Spread

- 20° Narrow Spot
- 30° Spot
- 40° Flood
- 50° Wide Flood

Lighting Type

- Downlight
- Up and downlight
- Adjustable

POWER & CONTROLS

Input Voltage

120 / 277V

Dimming

0-10V (120/277V): 1%
TRIAC/ELV (120V): 1%
DALI-2 (120/277V): 0.1%

SPECIALTY LENS

- Hexcell Louver

RATINGS & CERTIFICATIONS

- Wet Location / IP65 Rated Configurations Available
- NSF Listed (White and Black Finish Only)
- DarkSky Approved (Downlight with non-decorative trims only, CCT less than or equal to 3000K)

WARRANTY

5 year limited warranty; 50,000 hours



PRODUCT BUILDER

CYLINDER	XCP	XCP Pendant Mount Cylinder			
SHAPE	R	R Round			
SIZE		6 6.5 Inch	9 9 Inch		
SUSPENSION		C Cord	S Stem		
LENGTH		2 24"	4 48"	C Custom ¹	
CANOPY	S	S Standard			
LIGHT OPTIONS		D Downlight 	A Adjustable ²		
LUMENS DOWN		07 750 lm	10 1000 lm	12 1250 lm ³	15 1500 lm ³
BEAM SPREAD DOWN		NS Narrow Spot (20°)	SP Spot (30°)	FL Flood (40°)	WF Wide Flood (50°) ³
SPECIALTY LENS		0 None 	H Hex Louver ⁴		
LUMENS UP ^{3,5}		00 None 	07 750 lm	10 1000 lm	
		12 1250 lm	15 1500 lm		
BEAM SPREAD UP ^{3,5}		00 None 	NS Narrow Spot (20°)	SP Spot (30°)	
		FL Flood (40°)	WF Wide Flood (50°) ³		
CCT		24 2400K ^{6,7}	27 2700K ⁶	30 3000K ⁶	35 3500K
		40 4000K	3W Warm Dim ^{6,8}	T1 Tunable White ⁹ (4000K-1800K)	T2 Tunable White ⁹ (6500K-2700K)
STANDARD FINISH		WH White 	BK Black 	BZ Bronze 	
PREMIUM FINISH		BA Brushed Aluminum 	CC Custom Color 		
DIMMING		O 0-10V	T TRIAC/ELV	D DALI-2 ¹⁰	
EMERGENCY	000	000 None			
TRIM		S Standard	N Snoot ³ (Black Only)	W Wall Wash ³	
		O Decorative: Open ³	Y Decorative: Hyperbolic ³	F Decorative: Float ³	

¹ Custom Length Cord/Stem must be specified on PO. Minimum length 3", maximum length 156" (Cord), 96" (Stem)

² Only available in 750 or 1000lm, only available with standard trim

³ Not available in Adjustable

⁴ Only available in 750 or 1000lm. Not available with DALI-2, Decorative or Wall Wash Trims; Not available for 1250, 1500lm

⁵ Only available in 9" size, Damp Location rated. Not available for DALI-2

⁶ Required for Dark Sky Compliance

⁷ Only available in 750, 1000lm

⁸ Only available in 1000 lm; Not available in Narrow Spot beam spread

⁹ Only available in DALI-2 dimming and output of 1000lm for Downlight, 750lm for Adjustable; Not available with Narrow Spot beam spread

¹⁰ For Downlight: Only available in 1000lm with Warm Dim or Tunable White CCT and 1250lm with Static CCT; For Adjustable: Only available in 1000lm with Warm Dim or Static CCT and 750lm with Tunable White CCT

 Required for Wet Location/IP65 rating

DOWNLIGHT MODULE PERFORMANCE

Based on 93 CRI, 3000K Downlight Module + Standard White Trim (S) Configuration

(Please refer to IES files for other trim types)

		STATIC CCT				WARM DIM	T1 TUNABLE WHITE	T2 TUNABLE WHITE
LED CHIP		CREE 93 CRI				Bridgelux 93 CRI		
SDCM		2-STEP				3-STEP		
		07	10	12	15	10	10	10
		9.5W	12.5W	14.3W	14.3W	12.0W	14.3W	14.3W
NS	Lumens	843	1099	1221	1418	N/A		
	LPW ¹	93.6	89.4	87.2	98.5			
	CBCP ²	4005	5224	5804	6738			
	UGR ³	13.5	14.4	14.8	15.3			
SP	Lumens	801	1045	1161	1348	857	840	991
	LPW	89	85	82.9	93.6	69.7	68.3	80.6
	CBCP	2730	3560	3956	4593	2520	2053	2422
	UGR	13.9	14.9	15.2	15.7	14.2	16.8	15.9
FL	Lumens	813	1061	1179	1369	870	842	994
	LPW	90.4	86.3	84.2	95	70.7	68.5	80.8
	CBCP	1755	2289	2543	2953	1877	1587	1873
	UGR	13.9	14.8	15.2	15.7	14.2	16	15.2
WF	Lumens	807	1052	1169	1357	863	825	974
	LPW	89.6	85.5	83.5	94.2	70.1	67.1	79.1
	CBCP	1120	1461	1623	1885	1198	1296	1529
	UGR	15.6	16.5	16.9	17.4	15.8	14.9	16.8

		STATIC					WARM DIM		T1 TUNABLE WHITE			T2 TUNABLE WHITE		
CCT MULTIPLIER		2400K	2700K	3000K	3500K	4000K	1800K	3000K	1800K	3000K	4000K	2700K	3000K	6500K
		0.9	0.93	1	1.05	1.07	0.05	1	0.7	1	1.12	0.96	1	1.07

HEX LOUVER MULTIPLIER	0.6
--------------------------	-----

¹ LPW: Lumens per watt

² CBCP: Center beam candlepower

³ UGR: Unified glare ratio (0.7/0.5/0.2, 4H/8H)



ADJUSTABLE MODULE PERFORMANCE

Based on 93 CRI, 3000K Adjustable Module+ Standard White Trim (S) Configuration

(Please refer to IES files for other trim types)

		STATIC CCT		WARM DIM	T1 TUNABLE WHITE	T2 TUNABLE WHITE
LED CHIP		CREE 93 CRI		Bridgelux 93 CRI		
SDCM		2-STEP		3-STEP		
		07	10	10	07	07
		9.5W	12.5W	12.0W	12.5W	12.5W
NS	Lumens	729	984	N/A		
	LPW ¹	81	78.7			
	CBCP ²	5264	7106			
	UGR ³	14.6	15.6			
SP	Lumens	720	972	915	831	854
	LPW	80	77.8	73.2	69.2	71.1
	CBCP	1876	2532	2385	2164	2224
	UGR	15.5	16.6	16.4	16	16.1
FL	Lumens	739	998	939	853	876
	LPW	82.1	79.8	75.2	71.1	73
	CBCP	1032	1394	1312	1191	1224
	UGR	18.4	19.4	19.2	18.9	19

	STATIC					WARM DIM		T1 TUNABLE WHITE			T2 TUNABLE WHITE		
CCT MULTIPLIER	2400K	2700K	3000K	3500K	4000K	1800K	3000K	1800K	3000K	4000K	2700K	3000K	6500K
	0.8	0.93	1	1.05	1.07	0.05	1	0.7	1	1.12	0.96	1	1.07

HEX LOUVER MULTIPLIER	0.6
--------------------------	-----

¹ LPW: Lumens per watt

² CBCP: Center beam candlepower

³ UGR: Unified glare ratio (0.7/0.5/0.2, 4H/8H)



SUMMARY

	STATIC CCT	WARM DIM	TUNABLE WHITE
CCT	2400K, 2700K, 3000K, 3500K, 4000K	3000K - 1800K	4000K - 1800K; 6500K - 2700K
LUMENS	750 lm (9.5W), 1000 lm (12.5W), 1250 lm (14.3W), 1500lm (14.3W)	1000 lm (12.0W)	Downlight: 1000lm (14.3W), Adjustable: 750lm (12.5W)
EFFICACY	79 lm/W, 80 lm/W, 87 lm/W, 105 lm/W	83 lm/W	60lm/W, 70 lm/W
COLOR QUALITY	93 CRI ¹ , 2-step SDCM	93 CRI ¹ , 3-step SDCM	93 CRI ¹ , 3-step SDCM
BEAM SPREAD	Narrow Spot (20°), Spot (30°), Flood (40°), Wide Flood (50°)	Spot (30°), Flood (40°), Wide Flood (50°)	Spot (30°), Flood (40°), Wide Flood (50°)
DIMMING	0-10V (120/277V): 1% TRIAC/ELV (120V): 1% DALI-2 (120/277V): 0.1%	0-10V (120/277V): 1% TRIAC/ELV (120V): 1% DALI-2 (120/277V): 0.1%	DALI-2 (120/277V): 0.1%
LED CHIP	Bridgelux (2400K) Cree (All Other CCT)	Bridgelux	Bridgelux
LISTINGS	ENERGY STAR® qualified ² , California Title 24 2019 JA8 compliant, UL Listed for Wet Location, UL Certified US-CA, Declare, RoHS compliant, NSF/ANSI 2 listed, suitable for splash-zone ³ , DALI-2 Compliant, Compliant to FCC Title 47 Part 15; Class B, Dark Sky Compliant ⁴		

¹ Tested in accordance to IESNA LM-79-2008

² Refer to ENERGY STAR Certified light fixtures database

³ This product is evaluated in accordance to NSF/ANSI 2 for Splash Zone having designated trim finishes

⁴ Dark Sky approved is only applicable to CCT Options less than or equal to 3000K

ADDITIONAL

INPUT VOLTAGE: 120/277V, 50/60Hz

MAX INPUT CURRENT (120V): 0.11 amps

MAX INPUT CURRENT (277V): 0.05 amps

POWER FACTOR: Greater than 0.9

TOTAL HARMONIC DISTORTION: Less than 20%

AMBIENT OPERATING TEMPERATURE: -20°C to 40°C

LIFETIME: 50,000 hours at 70% lumen maintenance

WARRANTY: 5 year limited warranty

CYLINDER: Extruded aluminum

SIZE: 6.5", 9"

SUSPENSION: 24" or 48" standard length. Cord: Custom length up to 156". White, black or silver. Stem: Custom length up to 96". Painted steel stem with hanging straight endpoint up to 30° tilt (meets CA IR 16-9)

FINISH: White, Black, Bronze, Brushed Aluminum, Custom Color


INSTALLATION: Standard Canopy compatible with most 3" octagonal, 4" octagonal, 3" round and 4" round boxes



CYLINDER DIMENSION


3" Cord Mount

XCPR9C

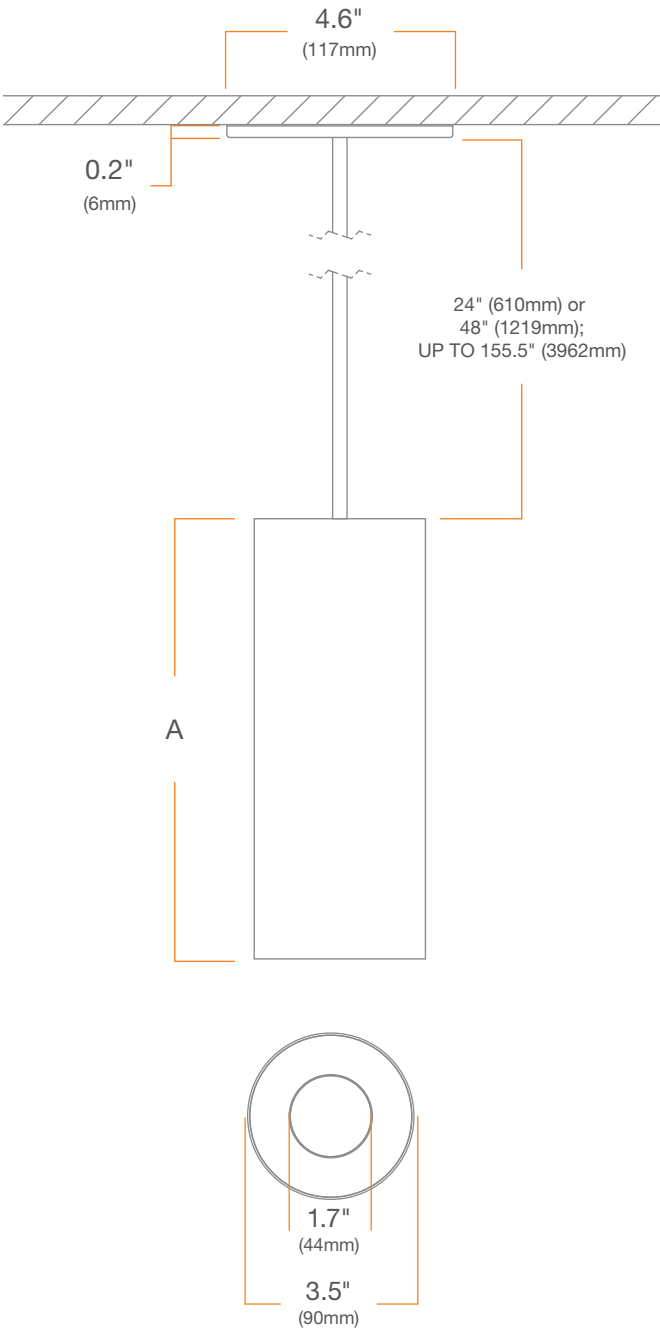

3" Stem Mount

XCPR9S

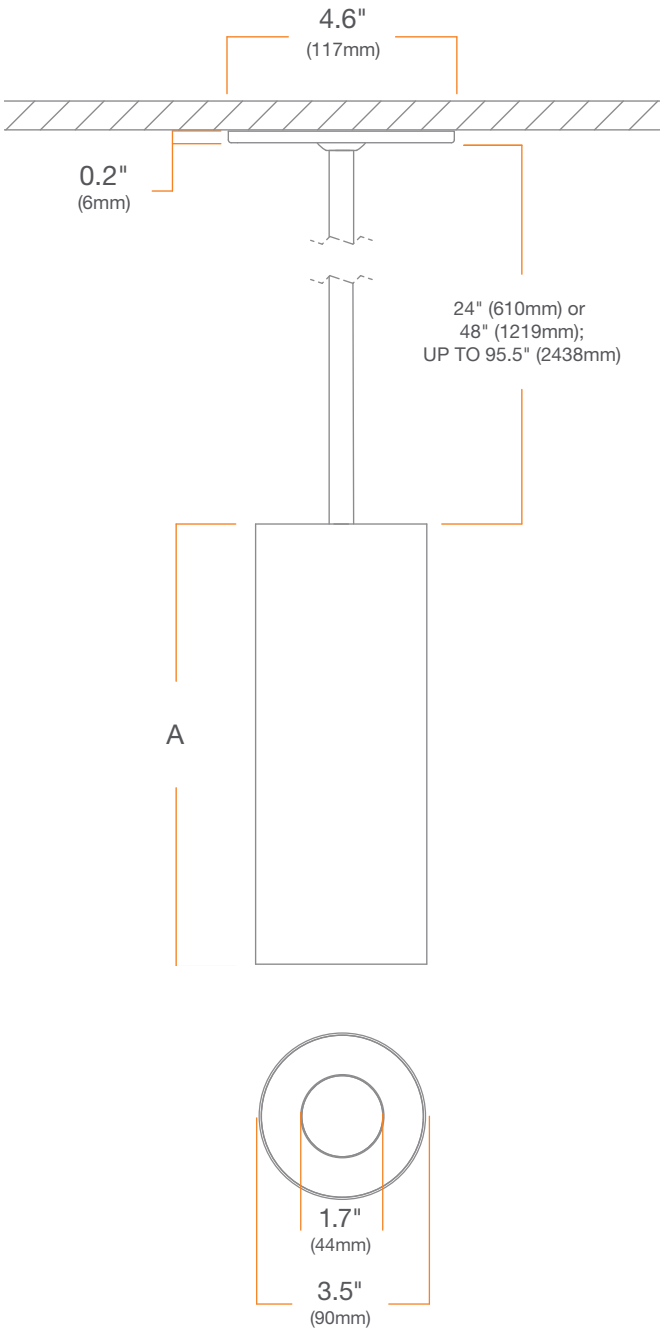


A
6.5" [165 mm]
9" [229 mm]

TRIMS + DOWNLIGHT MODULE


Standard Trim

-S

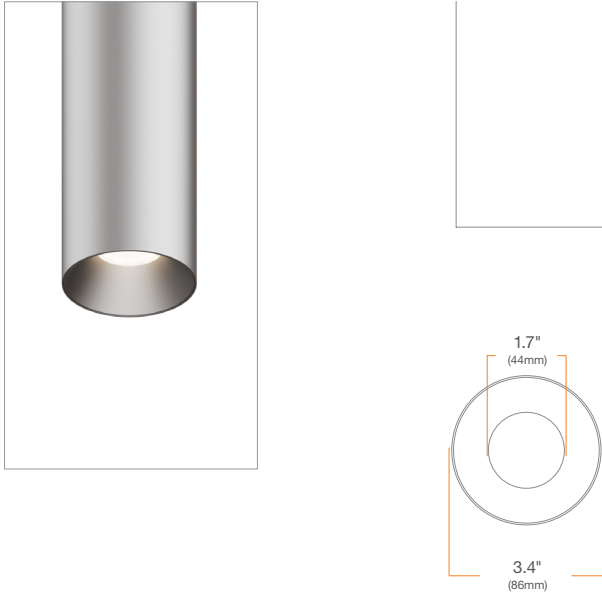


Wall Wash Trim

-W

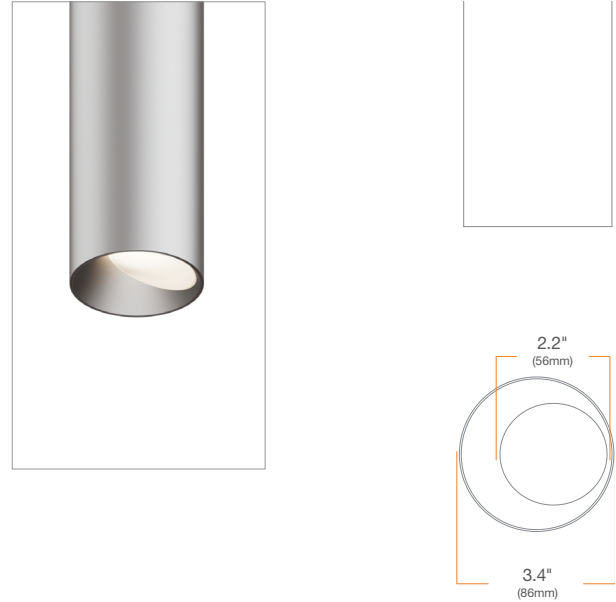


Snoot Trim

-N

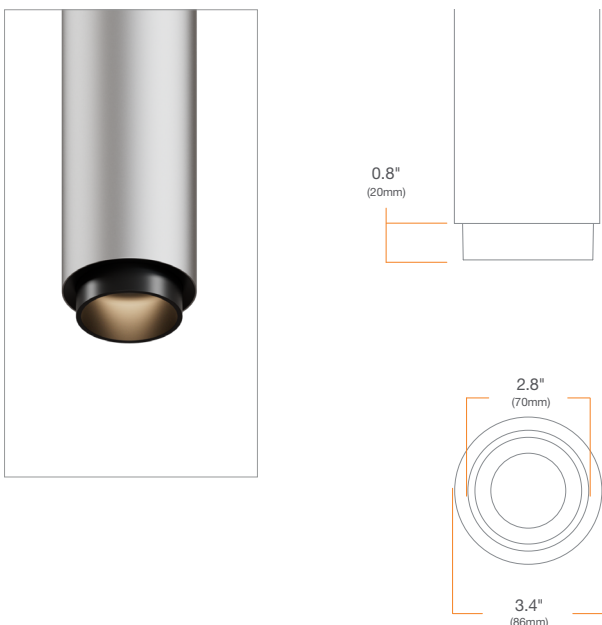

Decorative Float Trim


-F

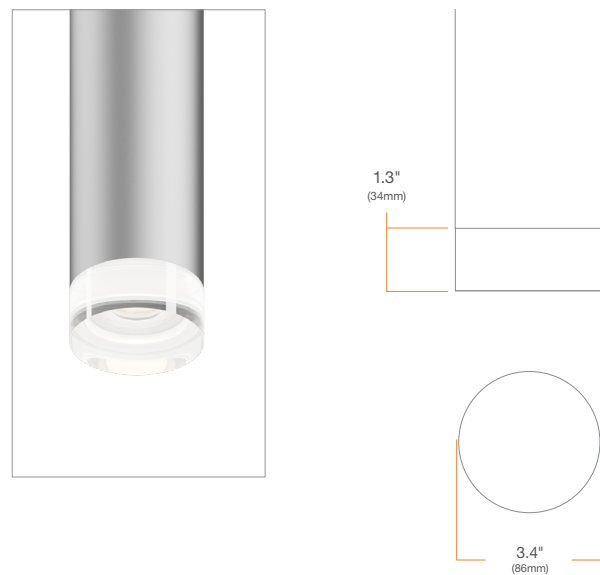

TRIMS + DOWNLIGHT MODULE


Decorative Hyperbolic Trim

-Y

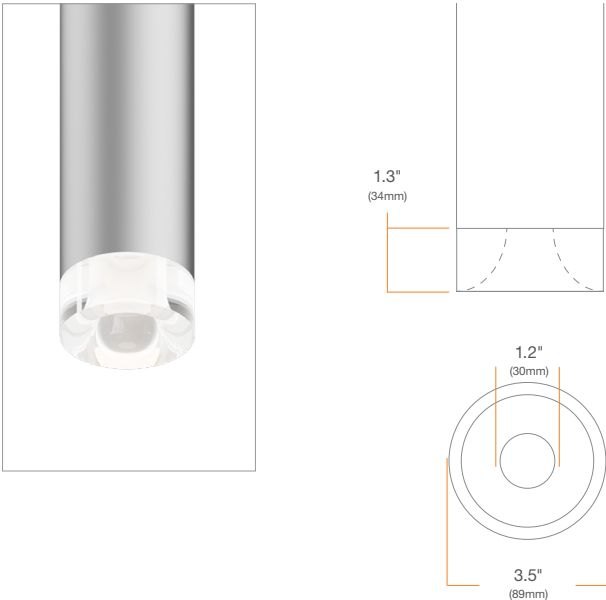

Decorative Open Trim


-O

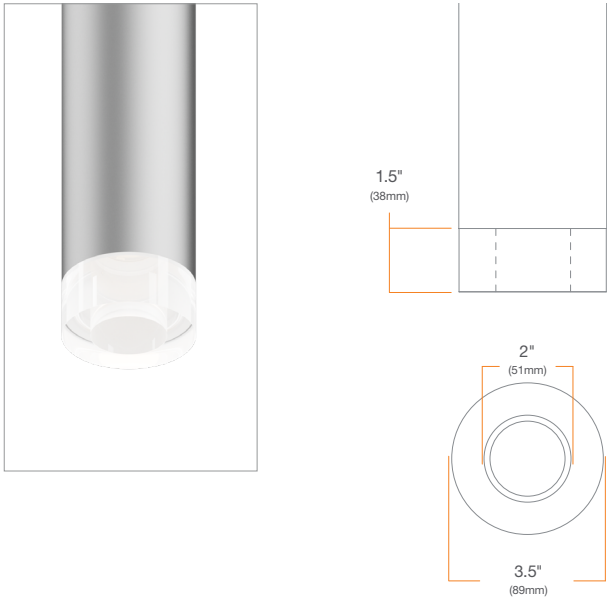

TRIMS + ADJUSTABLE MODULE


Standard Trim

-S

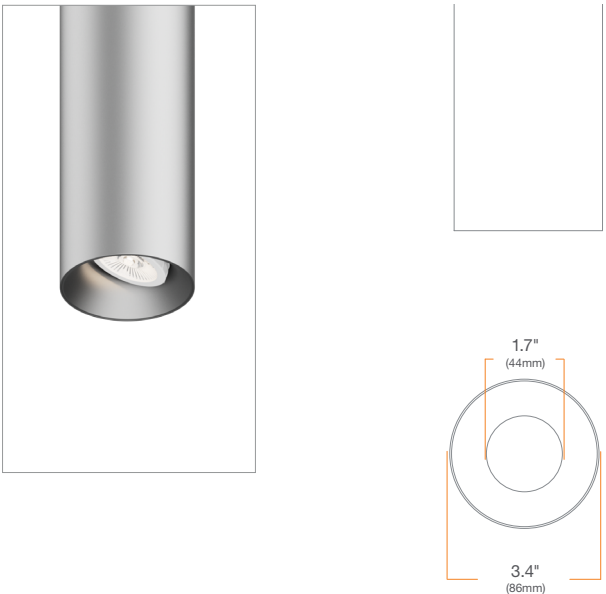

PHOTOMETRY

X Series Cylinder 750 lm, 3000K, Narrow Spot

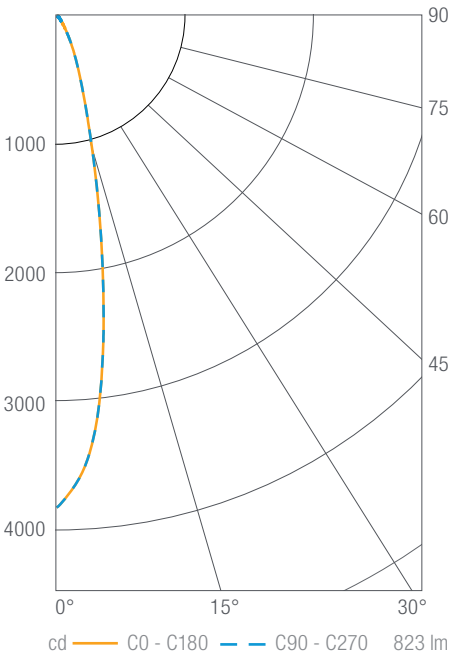

Luminous Intensity

Gamma	C 0°
0°	3916
5°	3377
10°	2127
15°	1092
20°	574
25°	336
30°	186
35°	103
40°	62
45°	42
50°	29
55°	21
60°	17
65°	13
70°	10
75°	7
80°	4
85°	2
90°	0

Values in candela

Zonal Lumen Summary


Zone	Lumens	Luminaire %
0-30	704	86
0-40	761	92
0-60	804	98
0-90	823	100
0-180	823	100

Illuminance Chart

Distance from LED	Foot Candles	Diameter
3'	435	1.1'
6'	109	2.3'
9'	48	3.4'
12'	27	4.5'

Beam Angle: 21°

X Series Cylinder 750 lm, 3000K, Spot

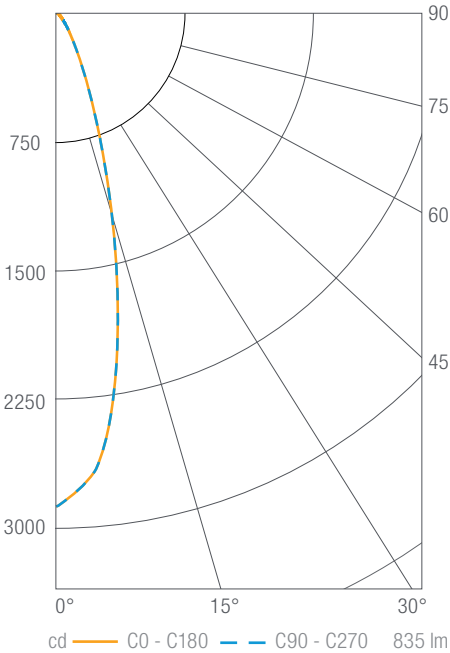

Luminous Intensity

Gamma	C 0°
0°	2848
5°	2649
10°	2003
15°	1237
20°	675
25°	364
30°	203
35°	119
40°	71
45°	45
50°	31
55°	22
60°	18
65°	14
70°	10
75°	7
80°	5
85°	2
90°	1

Values in candela

Zonal Lumen Summary

Zone	Lumens	Luminaire %
0-30	701	84
0-40	768	92
0-60	815	98
0-90	835	100
0-180	835	100


Illuminance Chart

Distance from LED	Foot Candles	Diameter
3'	317	1.5'
6'	79.1	2.9'
9'	35.2	4.4'
12'	19.8	5.9'

Beam Angle: 28°

PHOTOMETRY

X Series Cylinder 750 lm, 3000K, Flood

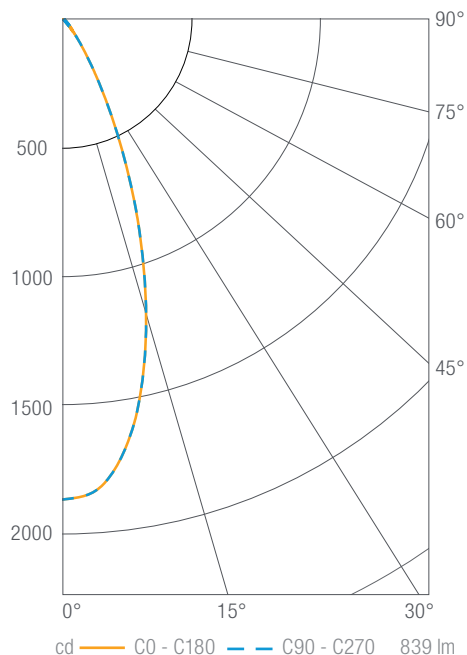

Luminous Intensity

Gamma	C 0°
0°	1831
5°	1786
10°	1578
15°	1239
20°	858
25°	516
30°	276
35°	142
40°	77
45°	46
50°	29
55°	19
60°	15
65°	12
70°	9
75°	6
80°	4
85°	2
90°	1

Values in candela

Zonal Lumen Summary


Zone	Lumens	Luminaire %
0-30	688	82
0-40	773	92
0-60	821	98
0-90	839	100
0-180	839	100

Illuminance Chart

Distance from LED	Foot Candles	Diameter
3'	204	2.1'
6'	51	4.2'
9'	23	6.3'
12'	13	8.4'

Beam Angle: 39°

X Series Cylinder 750 lm, 3000K, Wide Flood

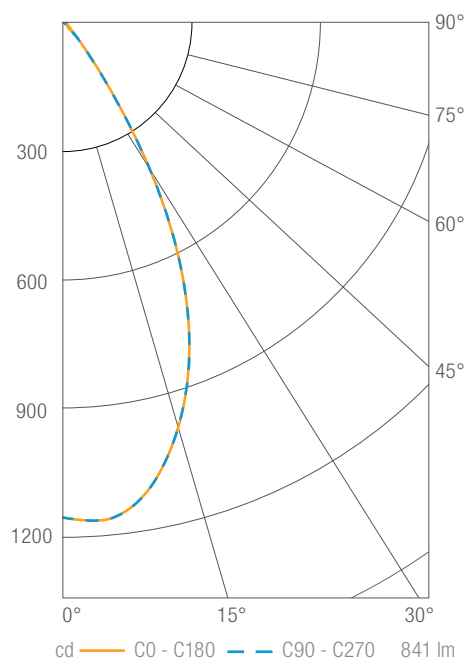

Luminous Intensity

Gamma	C 0°
0°	1158
5°	1167
10°	1120
15°	1017
20°	872
25°	681
30°	449
35°	221
40°	97
45°	48
50°	28
55°	21
60°	17
65°	14
70°	11
75°	8
80°	5
85°	2
90°	0

Values in candela

Zonal Lumen Summary


Zone	Lumens	Luminaire %
0-30	645	77
0-40	770	92
0-60	820	98
0-90	841	100
0-180	841	100

Illuminance Chart

Distance from LED	Foot Candles	Diameter
3'	129	3.1'
6'	32.2	6.2'
9'	14.3	9.2'
12'	8	12.3'

Beam Angle: 54°

PHOTOMETRY

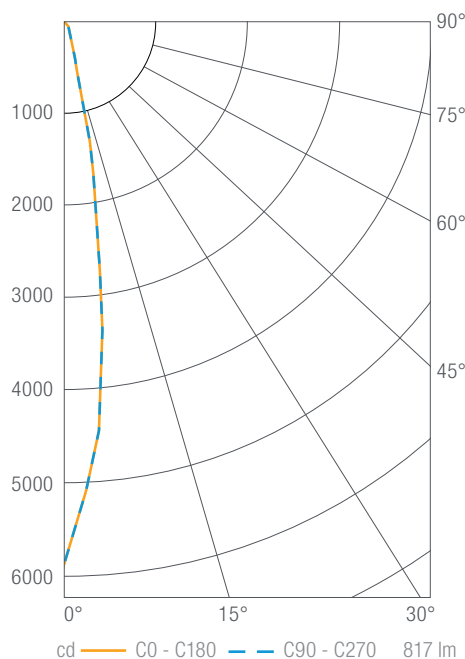X Series Cylinder Adjustable, 750 lm, 3000K, Narrow Spot

Luminous Intensity

Gamma	C 0°
0°	5897
5°	4418
10°	1911
15°	561
20°	280
25°	165
30°	117
35°	87
40°	69
45°	57
50°	47
55°	38
60°	31
65°	23
70°	16
75°	10
80°	4
85°	1
90°	0

Values in candela


Zonal Lumen Summary

Zone	Lumens	Luminaire %
0-30	645	79
0-40	701	86
0-60	781	96
0-90	817	100
0-180	817	100

Illuminance Chart

Distance from LED	Foot Candles	Diameter
3'	655	0.8'
6'	164	1.7'
9'	73	2.5'
12'	41	3.3'

Beam Angle: 16°

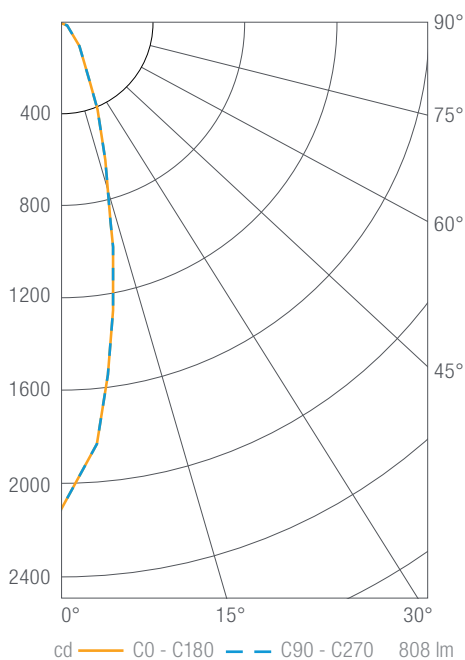X Series Cylinder Adjustable, 750 lm, 3000K, Spot

Luminous Intensity

Gamma	C 0°
0°	2105
5°	1826
10°	1282
15°	800
20°	497
25°	310
30°	201
35°	137
40°	98
45°	73
50°	57
55°	45
60°	35
65°	23
70°	12
75°	5
80°	3
85°	2
90°	0

Values in candela

Zonal Lumen Summary

Zone	Lumens	Luminaire %
0-30	573	71
0-40	668	83
0-60	773	96
0-90	808	100
0-180	808	100


Illuminance Chart

Distance from LED	Foot Candles	Diameter
3'	234	1.3'
6'	58	2.6'
9'	26	3.9'
12'	15	5.2'

Beam Angle: 28°

PHOTOMETRY

X Series Cylinder Adjustable, 750 lm, 3000K, Flood

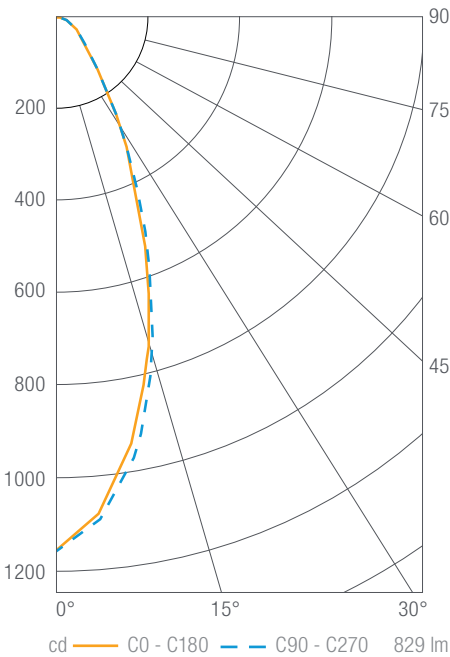

Luminous Intensity

Gamma	C 0°
0°	1158
5°	1081
10°	941
15°	765
20°	576
25°	414
30°	288
35°	192
40°	130
45°	96
50°	76
55°	61
60°	49
65°	38
70°	28
75°	18
80°	10
85°	4
90°	0

Values in candela

Zonal Lumen Summary

Zone	Lumens	Luminaire %
0-30	510	62
0-40	633	76
0-60	766	92
0-90	829	100
0-180	829	100

Illuminance Chart

Distance from LED	Foot Candles	Diameter
3'	129	2.2'
6'	32	4.5'
9'	14	6.7'
12'	8	9.0'

Beam Angle: 41°