


DRD1

All-in-One LED Downlight

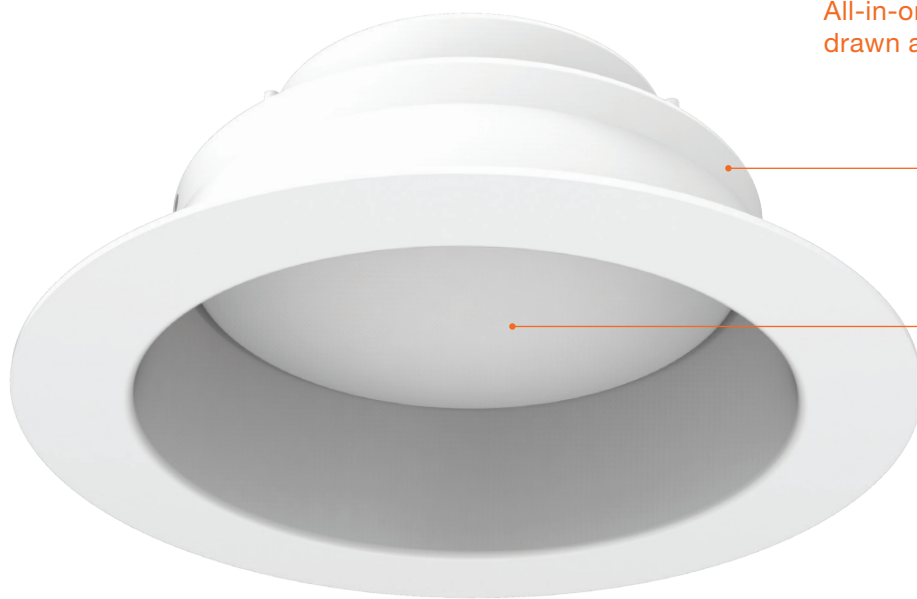

All-in-one design crafted from drawn aluminum

Completely recessed form factor for seamless design

Delivers up to 750 lumens at a 90+ CRI rating

Most affordable path to LED downlighting

Specs at a Glance

Application	New Construction, Remodel, Retrofit
Housing	4", 4" Shallow, 5", 6" Shallow, Octagonal Deep Junction Box, Square Deep Junction Box
Profile	4" Surface Mount, 6" Surface Mount, 4" Recessed, 6" Recessed
Lumen Output (Power)	Surface Mount: 750 lm (13.0W), Recessed: 700 lm (13.0W)
Color Quality	90+ CRI, 3-step SDCM
CCT Options	2700K, 3000K, 4000K
Finish	White
Lifetime (L70)	50,000 hrs
Input Voltage	120V
Dimming	Dimming down to 10% for TRIAC/ELV
Listings	cULus Listed, ENERGY STAR® qualified, UL Listed for Wet Location, IC rated, ASTM E283 certified Air Tight, UL 514A certified and ANSI/UL 263 compliant for up to 2 hour fire-resistant rating and STC/IIC Sound Rated when installed in DRDHNJ junction box frame-in kit
Warranty	5 years

Product Selection Guide

FRAME-IN KIT (Product Code Example: DRDH + N + IC4 = DRDHNIC4)

PRODUCT CODE	APPLICATION	APERTURE	
DRDH Housing	N New Construction	IC4 4" Aperture	IC6 6" Aperture
		IC4S 4" Aperture, Shallow	IC6S 6" Aperture, Shallow
	R Remodel	IC5 5" Aperture	J Junction Box <i>Only available for new construction</i>

LUMINAIRE (Product Code Example: DRD1 + S4 + 27 = DRD1S427)

PRODUCT CODE	PROFILE	CCT	
DRD1 Module	S4 4" Surface Mount <i>Only compatible with 4" frame-in kits or junction box</i>	R4 4" Recessed <i>Only compatible with 4" frame-in kits</i>	27 2700K
		S6 6" Surface Mount	R6 6" Recessed <i>Only compatible with 6" frame-in kits</i>
			40 4000K

Dimensions

