




### PRODUCT SPECIFICATIONS

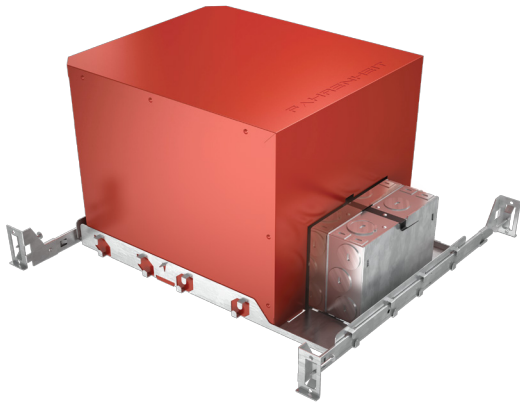

- Fire Rated: UL Listed fire resistance rated for up to two hours
- Sound Rated: Constructed to dampen unwanted noise
- IC rated, cULus Listed, UL Fire Listed, ASTM E283 certified Air Tight

### Frame-in Kit

**HOUSING:** Fire and sound-rated housing. Up to 120 minute fire rated L500 (floor-ceiling) & P500 (roof-ceiling) design. Die formed #24 gauge galvanized steel construction. Snap on galvanized cover. Non-combustible matt insulation.

**JUNCTION BOX:** Pre-wired #18 gauge galvanized steel junction box with (7) 1/2" knockouts and (4) Romex® knockouts and removable plates. Supplied with quick connectors for easy installation. Through branch wiring maximum of (8) #12 AWG 90°C branch circuit connectors (four-in, four-out).

**MOUNTING:** Pre-installed adjustable bar hangers engineered to accommodate lumber, laminated beams and T-bar.

**LAMP SOCKET BASE:** Porcelain medium base socket with nickel plated screw shell. Pre-wired with #18 gauge, SF1 junction box leads. Utilizes (1) 120V medium base lamp. Max 50W lamp configuration.

**RECOMMENDED LAMP TYPE:** Up to 50W BR30, PAR30, PAR20 or A19 LED lamp.

**CEILING:** 1/2" up to 1".

**CUTOUT:** 5 3/4" (5" frame-in kit), 6 3/8" (6" frame-in kit).

**LISTINGS:** IC rated. cULus Classified. UL Fire Listed. ASTM E283 certified Air Tight.

### Trim

**CONSTRUCTION:** Spun aluminum.

Product Code:	Type:	
Project:	Contact:	Date:



## PRODUCT SELECTION GUIDE

---



### FRAME-IN KIT (Product Code Example: **F5I**)

APERTURE	FIRE RATING
<b>F5I</b> 5" Aperture	<b>[Blank]</b> 1 Hour Fire Rating
<b>F6I</b> 6" Aperture	<b>2</b> 2 Hour Fire Rating

### TRIM

PRODUCT CODE	
<b>D530W-AT</b>	5" White Baffle / White Flange
<b>D530B-AT</b>	5" Black Baffle / Black Flange
<b>D600SFCWR</b>	6" Clear / White Flange
<b>D600SFC</b>	6" Clear / Clear Flange
<b>D630W-AT-OR</b>	6" White Baffle / White Flange


## FRAME-IN KIT DIMENSIONS

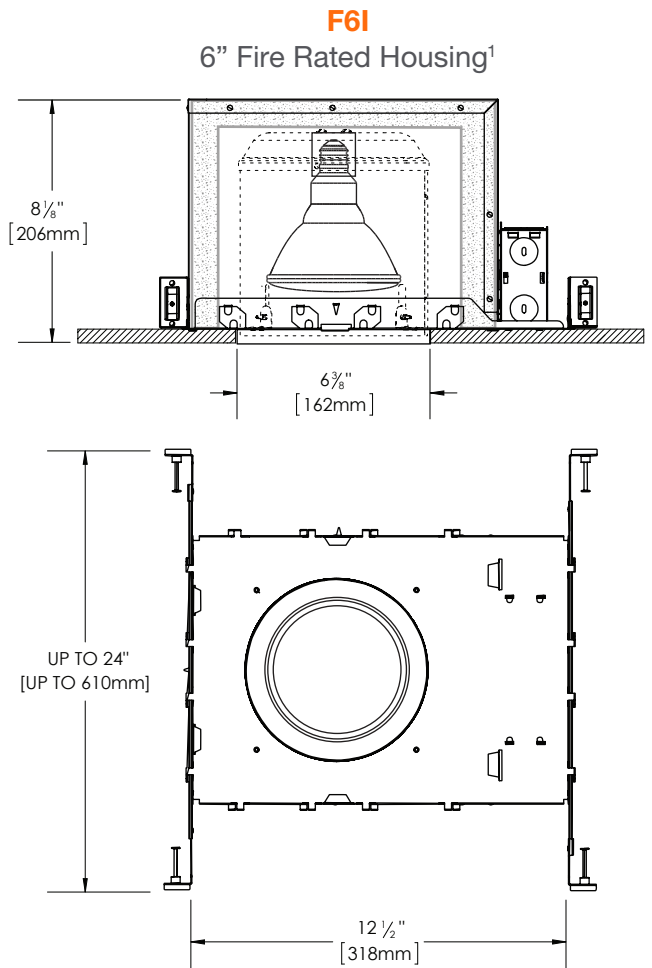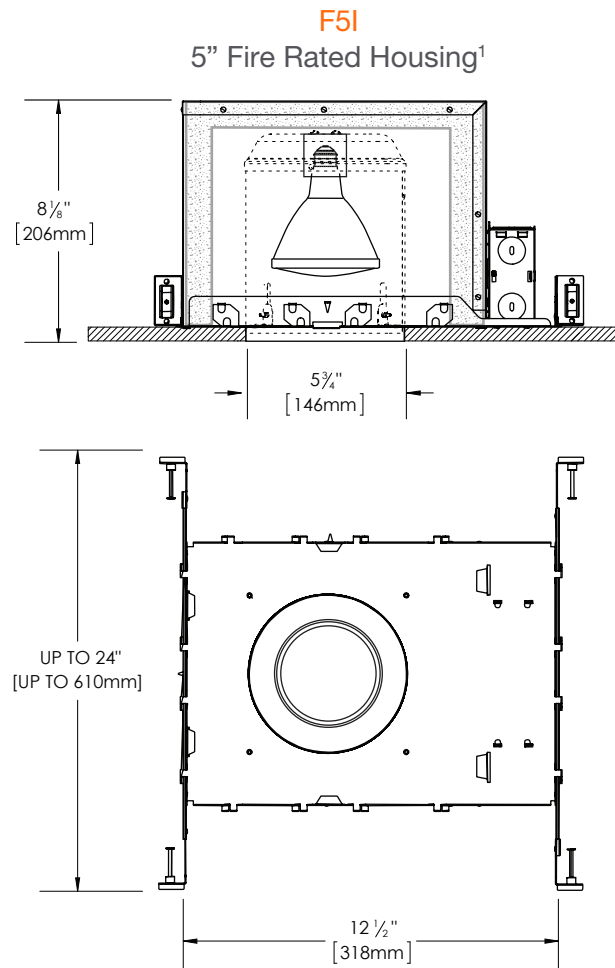


<sup>1</sup> Lamp not included

## TRIM DIMENSIONS

**D530**  
Baffle Trim



**D600**  
Smooth Trim



**D630**  
Baffle Trim

