

Catalog #		Type
Project		Date
Comments		

### PRODUCT SPECIFICATION DATA

#### DESCRIPTION

6" Line voltage Remodel IC Airtight Housing. Can be in direct contact with insulation. Ideal for general, accent and task lighting.

#### FEATURES

- UL / cUL listed for damp location, feed-through wiring, and direct contact with insulation
- Thermally protected against misuse of insulation materials and improper lamping
- Sealed housing to prevent airflow from air conditioned or heated areas into ceiling
- Housing adjusts to accommodate various ceiling thickness
- Adjustable socket mounting plate for proper positioning of different lamp types
- Can be dimmed using standard incandescent dimmer

#### HOUSING

Aluminum housing, vertically adjustable (up to 1") which allows housing to be flush with ceiling.

#### CLIPS

Four remodel tension clips secure the housing to the ceiling

#### JUNCTION BOX

Pre-wired junction box with 7 1/2" knockouts with pryout slots and (4) romex knockouts with built-in strain relief to hold wire in place without any connectors. Junction box is equipped with grounding wire. Listed for through branch circuit.

#### LAMP & SOCKET



Medium base porcelain with nickel plated copper screw shell socket. Maximum of 75W BR30/PAR30; 90W BR40

#### INSTALLATION

- 7 3/8" height allows the fixture to be installed where 2x8 joist exists
- Housing can be installed from below the ceiling
- Four remodeling tension clips can accommodate 3/8" to 5/8" thick ceiling
- Comes with quick connectors which makes wiring connection easy. No wire nuts necessary.

#### LISTINGS

UL/cUL Listed for feed through and damp location.

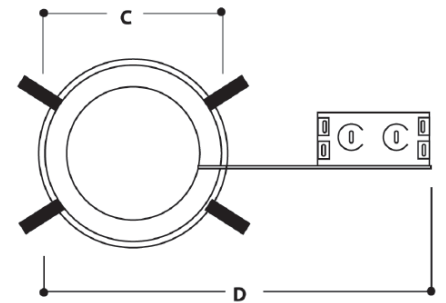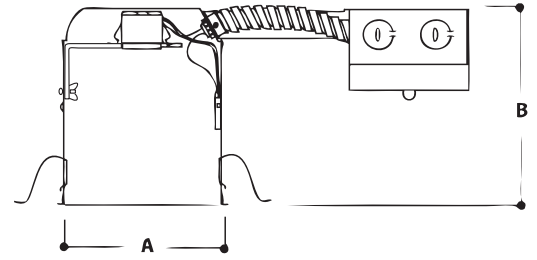

#### DIMENSIONS

#### CEILING CUT-OUT 6 3/8"

A:	6" (152mm)	C:	6 3/4" (171mm)
B:	7 3/8" (187mm)	D:	14 1/4" (362mm)

EXAMPLE:

Housing	Type	Trims	Trim Finish
DH6R	ICAT	D600	C

### ORDERING INFORMATION

Housing	Type	Trims				Trim Finish
DH6R - 6" Line Voltage Remodel Housing	ICAT - IC Airtight	D600	D67	D651	D604	C - Clear
		D656	D614	D670	D613	W - White
		D630	D616	D620	D602	B - Black
		D630 ATOR	D617	D621	D611	NS - Natural Steel
		D640	D629	D622	D615	G - Gold
		D608	D651	D623		
		D650	D629	D624		
		D64	D617	D60		
		D65	D629	D603		

