

SurfaceFrame

DRD2M Surface Mount LED Downlight



Specs at a Glance

Application	New Construction
Module	DRD2M
Lumen Output (Power)	750 lm (10.8W), 1000 lm (12.8W)
Efficiency	83 lm/W, 80 lm/W
Color Quality	93+ CRI, 2-step SDCM
CCT Options	2700K, 3000K, 3500K, 4000K
Lifetime (L70)	50,000 hrs
Input Voltage	120/277V
Dimming	Down to less than 5% for TRIAC/ELV at 120V, 5% for 0-10V at 120/277V, 1% for Lutron Hi-Lume at 120/77V
Emergency Lighting	Optional Emergency LED Driver for lighting up to 90 minutes in event of power failure
Trim Shape	Round
Trim Style	Smooth
Trim Finish	White
Listings	cULus Listed, DRDHNJO metallic outlet box certified UL514A, STC/IIC Sound Rated, IC rated, ASTM E283 certified Air Tight, ENERGY STAR® qualified, California Title 24 2016 JA8 compliant, UL Listed for Wet Location
Warranty	5 years

Product Selection Example

See spec sheets for complete ordering information and options

FRAME-IN KIT (Product Code Example: DRDH + N + JO = DRDHNJO)

PRODUCT CODE		APPLICATION		APERTURE		DRIVER		OPTION	
<input type="text"/>		<input type="text"/>		<input type="text"/>		<input type="text"/>		<input type="text"/>	
DRDH	Housing	N	New Construction	JO	SurfaceFrame Octagonal Junction Box	[Blank]	Integrated TRIAC/ELV	[Blank]	None
						70	0-10V, 750 lm	EM	EM Driver
						100	0-10V, 1000 lm		
						7C	Lutron LDE1, 750 lm		
						10C	Lutron LDE1, 1000 lm		
						7W	Lutron L3DA3W, 750 lm		
						10W	Lutron L3DA3W, 1000 lm		


LIGHT ENGINE (Product Code Example: DRD2M + 7 + 9 + 27 = DRD2M7927)

PRODUCT CODE		LUMENS (WATTS)		CRI		CCT		DRIVER	
<input type="text"/>		<input type="text"/>		<input type="text"/>		<input type="text"/>		<input type="text"/>	
DRD2M	Module	7	750 lm (10.8W)	9	93+ CRI	27	2700K	[Blank]	Integrated TRIAC/ELV
		10	1000 lm (12.8W)			30	3000K	A	Alternate Dimming
						35	3500K		
						40	4000K		

TRIM (Product Code Example: DRD2T + R + J + S + WH = DRD2TRJSWH)

PRODUCT CODE		SHAPE		APERTURE		STYLE		FINISH	
<input type="text"/>		<input type="text"/>		<input type="text"/>		<input type="text"/>		<input type="text"/>	
DRD2T	Trim	R	Round	J	Junction Box	S	Shooth	WH	White

Dimensions

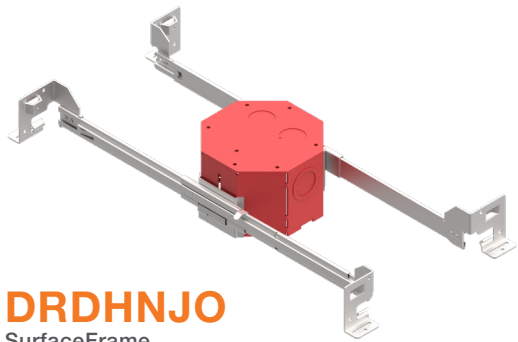

DRDHNJO
SurfaceFrame
Octagonal Junction Box

